

**Features**

- Low power, small size, light weight Data Recorder.
- Rugged anodized aluminum enclosure.
- 16 MBytes of memory, with data retention in case of power loss.
- 5 internal sensors:
  - 3 internal accelerometers:  $\pm 2G$  or  $\pm 6G$ .
  - Internal Temperature.
  - Supply Voltage
- 1 PWM control/alarm output.
- 1 USB 2.0 full-speed port.
- 3 RS-232 serial ports (COM)
- 3 Vehicle data bus ports
  - CAN1: CAN 2.0a/b (HS-CAN)
  - CAN2: CAN 2.0a/b (HS-CAN – see other options below)
  - SAE-J1708/SAE-J1587
- Compatibility with:
  - COMGPS – GPS receiver with antenna.
  - COMBLU – Bluetooth radio transceiver.
  - COMMH1 – 900 MHz long range radio transceiver.
  - COMGPR – GPRS (GSM) cellular network radio transceiver.
  - CANOBD – Connect to all OBD compatible vehicle data bus (J1850PWM, J1850VPW, ISO9141-2, ISO 14230 KWP, ISO15765 - CAN)
- Input activated recording – automatic start/stop.
- Sampling rate up to 4kHz per channel.
- Vibration Lock™ - Mil spec connector, no tools required.

**Options**

<b>OPTMEM-512</b>	<b>Memory upgrade from 16 to 512 MB</b>
<b>OPTEXT</b>	<b>8 external inputs:</b> <ul style="list-style-type: none"> <li>– 4 analog inputs</li> <li>– 4 digital inputs: frequency, counters or state</li> </ul>
<b>OPTVD2</b>	<b>Vehicle Data bus option 2</b> <ul style="list-style-type: none"> <li>– CAN1: CAN 2.0a/b (HS-CAN)</li> <li>– CAN2: CAN 2.0a/b (FT-CAN)</li> <li>– SAE-J1708/SAE-J1587</li> </ul>
<b>OPTVD3</b>	<b>Vehicle Data bus option 2</b> <ul style="list-style-type: none"> <li>– CAN1: CAN 2.0a/b (HS-CAN)</li> <li>– CAN2: CAN 2.0a/b (SW-CAN)</li> <li>– SAE-J1708/SAE-J1587</li> </ul>



**Installation**

- Attach the Recorder to the vehicle chassis using Dual-Lock™ Velcro.
- Position the Recorder such that the three LEDs indicating the system status are visible.
- Align the Recorder's X,Y and Z axis along the sensing direction.
- Use the main recorder harness (CBLMN1) to connect the Recorder to the power supply and peripherals.
- Protect the Recorder from extreme vibrations.
- Make sure that air flows over the Recorder to avoid high temperatures.
- The Recorder supply ground should connect straight to the power supply. Use 16-18-AWG for power connection.
- Keep the Recorder and its wires at least 20cm (8") away from high interference electrical devices, such as: ignition coils, plug leads, high-current leads, high emission electronic modules or antennas.

**Calibration**

This unit is supplied with calibration data for its three internal accelerometers.

**Specifications**

Description	Symbol	Min	Typ	Max	Unit
Power Supply 11-18V input Input Voltage <sup>1</sup> Supply Current @ 11.0V <sup>2</sup> @ 18.0V	$V_{in}$ $I_{in-11}$ $I_{in-18}$	11.0	48 30	18.0	V mA mA
Operating Temperature Storage Temperature	$T_O$ $T_S$	-40 -40		85 85	C C
Internal Accelerometer ±2G resolution X, Y and Z ±6G resolution X, Y and Z 0G level non-linearity X, Y non-linearity Z bandwidth X, Y and Z	ACCRES <sub>XYZ2G</sub> ACCRES <sub>XYZ26</sub> ACCZGL <sub>XYZ</sub> ACCNL <sub>XY</sub> ACCNL <sub>Z</sub> ACCBW <sub>XYZ</sub>		0.00488 0.01465 2.5 ±1 ±3 10		G/bit G/bit V %FS %FS Hz
Internal Temperature Sensor Measurement range Accuracy over measuring range Resolution	SIG <sub>TMP</sub> ACC <sub>TMP</sub> RES <sub>TMP</sub>	-40	±2 0.48828	150	C C C/bit
DTC detector group Supply voltage <sup>3</sup> Total supply current <sup>4</sup> Input low voltage <sup>5</sup> Input high voltage <sup>6</sup> Internal pull-up resistor Input Capacitance Input Frequency Sampling rate per input Counter Resolution	$V_{DTC}$ $I_{DTC}$ DTC <sub>Lo</sub> DTC <sub>Hi</sub> $R_{pup}$ $C_{DTC}$ $F_{DTC}$ SAMP <sub>DTC</sub> RES <sub>DTC</sub>	$V_{in}-0.6$ -50 2.6	4.7 100	$V_{in}$ 170 2.4 50 1000 2	V mA V V kΩ pF Hz Samp.sec us
A sensor group Supply voltage Total supply current Input Voltage <sup>7</sup> Input Accuracy Input Capacitance A/D converter resolution A/D conversion time per chan. A/D conv. time all SENA chan. A/D conv. frequency Sampling speed per input	$V_{SENA}$ $I_{SENA}$ SIG <sub>SENA</sub> ACU <sub>SENA</sub> $C_{SENA}$ ADR <sub>SENA</sub> ADT <sub>SENA</sub> ADTA <sub>SENA</sub> ADTF <sub>SENA</sub> SAMP <sub>SENA</sub>	$V_{in}-0.6$ 0	<0.1 100 0.0048828	$V_{in}$ 170 5.0 17.85 4000	V mA V % FS pF V/bit us us kHz Samp./sec
COM group Supply voltage Total supply Current Regulated Supply Voltage Regulated Supply Current Control output Voltage	$V_{COM}$ $I_{COM}$ $V_{COM-REG}$ $I_{COM-REG}$ $V_{CTL}$	$V_{in}-0.6$ 4.75 0		$V_{in}$ 500 5.25 500 5	V mA V mA V

<sup>1</sup> Use PWSISO-240 for extended input range 18-36V.

<sup>2</sup> Recorder with no sensor attached

<sup>3</sup> Voltage supplied by the Recorder to the given sensor or detector group.

<sup>4</sup> Maximum current before the auto-reset fuse interrupts supply to the given sensor or detector group.




<sup>5</sup> Single-ended voltage for each detector input.

<sup>6</sup> Single-ended voltage for each detector input.

<sup>7</sup> Single-ended voltage for each sensor input

**V8.0 Fleet Manager System – BOXV80-FMS**

CAN HSCAN Interface (Philips TJA-1050)					
Bit Rate	$BR_{HSCAN}$	10		1000	KBbit/sec
DC voltage at pin CANH/CANL	$V_{HSCANH}/V_{HSCANL}$	-27		40	V
Transient voltage at pin CANH/CANL	$V_{tHSCANH}/V_{tHSCANL}$	-200		200	V
CAN FTCAN Interface (Motorola MC33388)					
Bit Rate	$BR_{FTCAN}$	10		125	KBit/sec
DC voltage at pin CANH/CANL	$V_{FTCANH}/V_{FTCANL}$	-20		27	V
Transient voltage at pin CANH/CANL	$V_{tFTCANH}/V_{tFTCANL}$	-40		40	V
CAN SWCAN Interface (Philips AU5790)			33		
Bit Rate	$BR_{SWCAN}$	10		100	Kbit/sec
DC voltage at pin CANH	$V_{SWCANH}$	-10		18	V
Transient voltage at pin CANH	$V_{tSWCANH}$	-100		100	V
SAE J1708 Interface (National DS36277)			33		
Bit Rate	$BR_{HSCAN}$			1	Mbit/sec
DC voltage at pin CANH	$V_{HSCANH}$	-27		40	V
DC voltage at pin CANL	$V_{HSCANL}$	-27		40	V
Transient voltage at pin CANH	$V_{tHSCANH}$	-200		200	V
Transient voltage at pin CANL	$V_{tHSCANL}$	-200		200	V
Effective download throughput					
USB			530		KBytes/sec
COM1, COM2, COM3 (RS-232)			10		kBytes/sec
Mechanical Specifications					
Height			31.75 (1.25)		mm(in.)
Depth			101 (4.00)		mm(in.)
Width			114.3 (4.5)		mm(in.)
Weight			260 (9.17)		g(oz.)

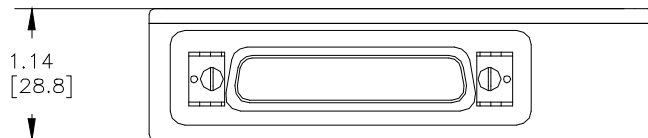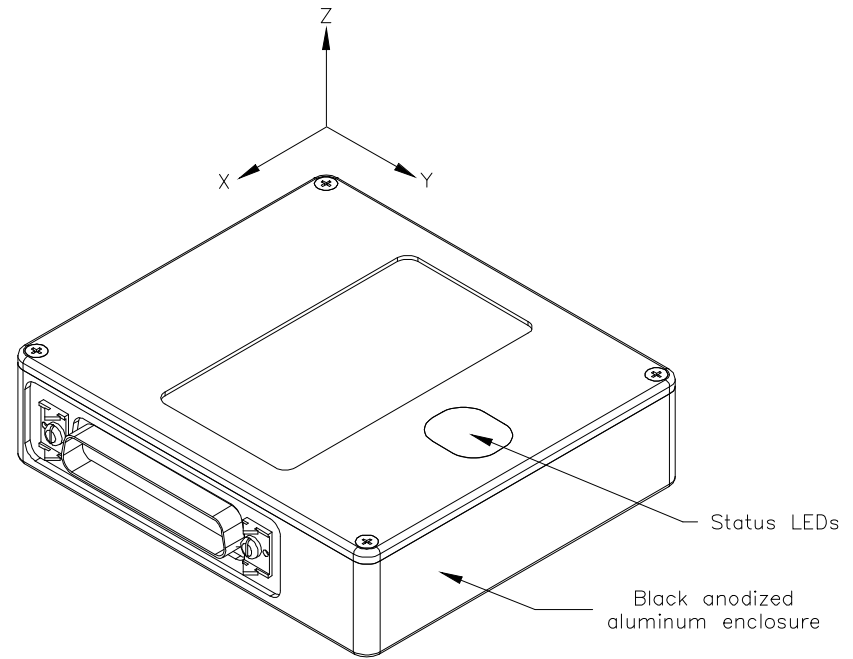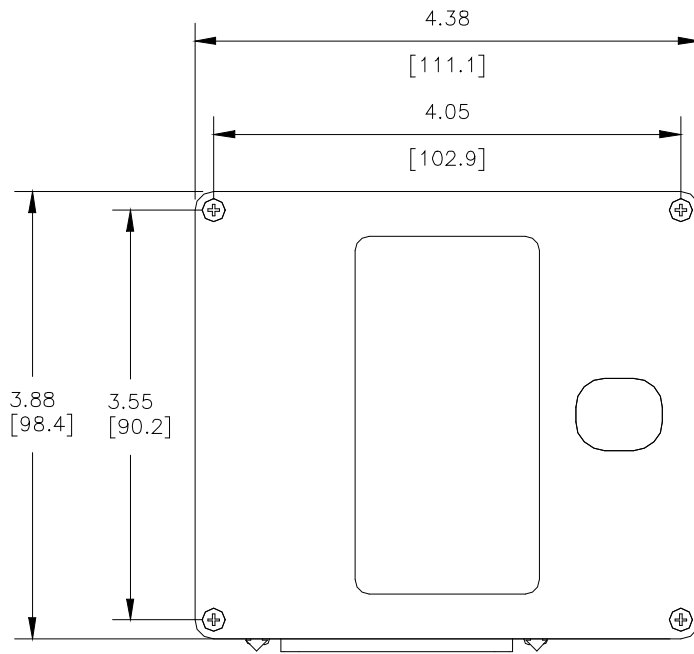

All dimensions are in inches [millimeters].